

COLD WATER H.P. CLEANER IDROPULITRICE AD ACQUA FREDDA

MAXI 4-5

*Industrial cold water high pressure washer.
Top efficiency for large jobs.*

*Handy, easy to use, with a flow and
pressure able to cope with the most
challenging and resistant situations.*

*Sturdiness, attractive design and durability
are guaranteed by a shimmed painted steel
frame and a stainless steel cover.*

Classe Industriale ad acqua fredda al
massimo livello.

Il top dell'efficienza per i grandi lavori.
Maneggevole, semplice da utilizzare ma
con una portata e una potenza in grado
di far fronte alle situazioni più impegnative
e resistenti.

Robustezza, design e lunga durata nel
tempo sono garantiti da un telaio in acciaio
spessorato verniciato e da una cofanatura
in acciaio inox.





Standard for Maxi 4
Optional for Maxi 5

Industrial triplex pumps with ceramic plungers connecting rod system and brass head.
Pressure gauge (Maxi 5 - 1000 bar)
Pressure regulator
(600 bar in stainless steel AISI 304 Maxi 5).
Pompa professionale con testa in ottone e pistoni in ceramica.
Manometro (Maxi 5 - 1000 bar).
Regolazione della pressione (valvola inox 600 bar Maxi 5).

IE2 High efficiency electric Motor (Maxi5)
Motore elettrico ad alta efficienza IE2 (Maxi5).
400/690 V / 50 Hz Standard
60 Hz Su richiesta / On request

5 mt. electric cable
Cavo elettrico da 5 mt.

Parking brake.
Freno di stazionamento.



TSI security system including: (A) time delayed auto stop start; (B) stop for lack of water; (C) stop for leak detection; (D) stop after 1 hour in total stop; (E) stop in case of motor over-heating - error signal indicated by warning lights.

Comando a distanza TSI (Total Stop Intelligente) con funzioni: (A) total stop temporizzato; (B) arresto dopo 1 ora di total stop; (C) arresto per microperdite; (D) arresto per mancanza acqua; (E) arresto per surriscaldamento motore - segnalaz. d'errore tramite spia intermittente.

Flexible coupling with steel protection (Maxi 5).
Giunto elastico con protezione (Maxi 5).

Flexible coupling with flange (Maxi 4).
Flangia e giunto elastico (Maxi 4).

Stainless steel water tank for cooling the pump head (Maxi 5 standard, Maxi 4 optional)


Vaschetta acqua inox per raffreddamento testata (Maxi 5 standard, Maxi 4 optional).



STANDARD ACCESSORIES ACCESSORI STANDARD



- A** Maxi 4 Gun / Pistola Maxi 4 (cod. 6600600)
- A₁** Maxi 5 Gun / Pistola Maxi 5 (cod. P30540000)
- B** Maxi 4 Lance / Lancia Maxi 4 (cod. 6600610)
- B₁** Maxi 5 Lance / Lancia Maxi 5 (cod. P30500092)
- C** Maxi 4 10 mt. H.P. hose / Tubo A.P. 10 mt. Maxi 4 (cod. 6000145)
- C₁** Maxi 5 10 mt. H.P. hose / Tubo A.P. 10 mt. Maxi 5 (cod. 6500135)

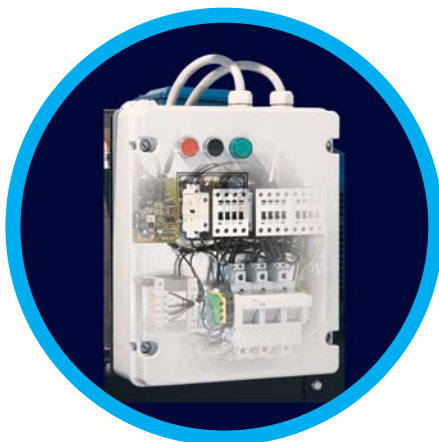

Electric panel.
Quadro elettrico.

MAXI 4	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza kW	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso kg	Box dimensions Dimensione scat. LxWxH (cm)	Pallet q.ty Q.tà pallet	Q.ty per container Q.tà per container		Truck q.ty Q.tà camion	Machine dimensions Dimensione macchina LxWxH (cm)	
		bar	PSI	Lt/h	gph				°C	°F				20 ft	40 ft			
SWW350.21 T-AST-TSI	94500142	350	5.100	1.260	333													
SHP500.15 T-AST-TSI	94500149	500	7.250	900	238	15	160	1.450	60	140	215	89x146x107	2	16	32	32	82x140x90	
W150.50 T-AST-TSI	94500147	150	2.200	3.000	793													

MAXI 5	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza kW	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso kg	Box dimensions Dimensione scat. LxWxH (cm)	Pallet q.ty Q.tà pallet	Q.ty per container Q.tà per container		Truck q.ty Q.tà camion	Machine dimensions Dimensione macchina LxWxH (cm)
		bar	PSI	Lt/h	gph				°C	°F				20 ft	40 ft		
SHP500.22 T-AST	94500160	500	7.250	1.320	349	22,5	180	1.450	60	140	335	89x146x107	2	16	32	32	89x146x107
SHP500.22 T-AST-TSI	94500165	500	7.250	1.320	349	22,5											

Pump type - Tipo pompe **SWW - SHP** **A.R.** **W** **I.P.** T=3~ **AST** = Star triangle soft start - Avviamento stella triangolo
TSI = Intelligent Total Stop - Arresto Totale Intelligente

OPTIONAL ACCESSORIES ACCESSORI OPTIONAL



500 bar inox rotating nozzle
Ugello rotante 500 bar inox

cod. 1000386



350 bar rotating nozzle
Ugello rotante 350 bar

cod. 1000387/KIT



Sand blasting head 500 bar round jet
Testina sabbiante 500 bar a getto tondo + sonda + tubo

cod. P25046000 + cod. P16140140 + cod. P25030020 + cod. 4000141



Maxi5 shoulder rest
Controspalla Maxi5

cod. P30506000